




1

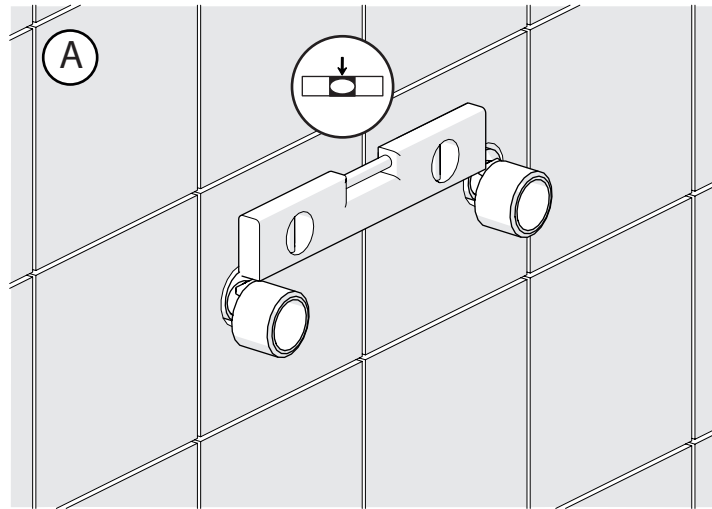



3

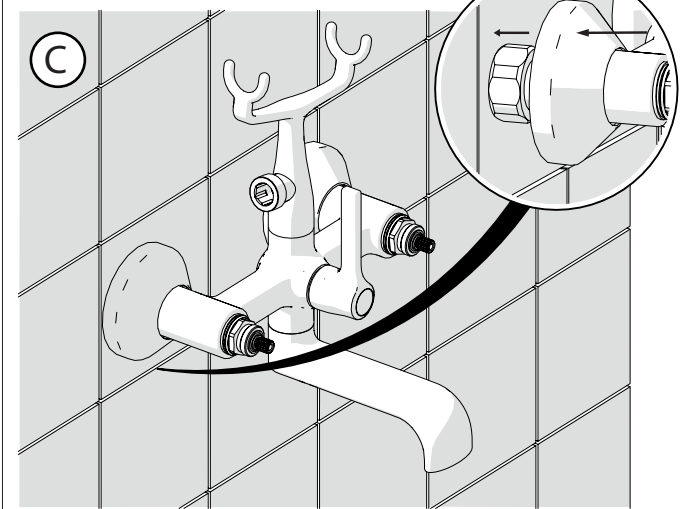


5

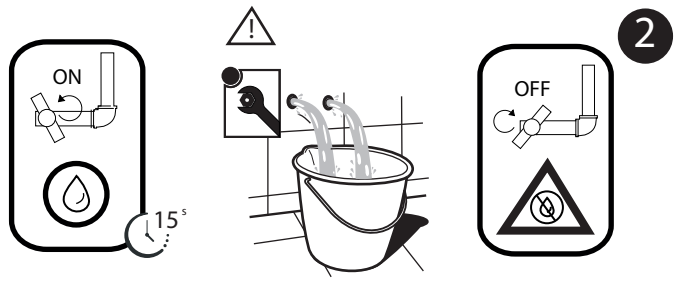



2

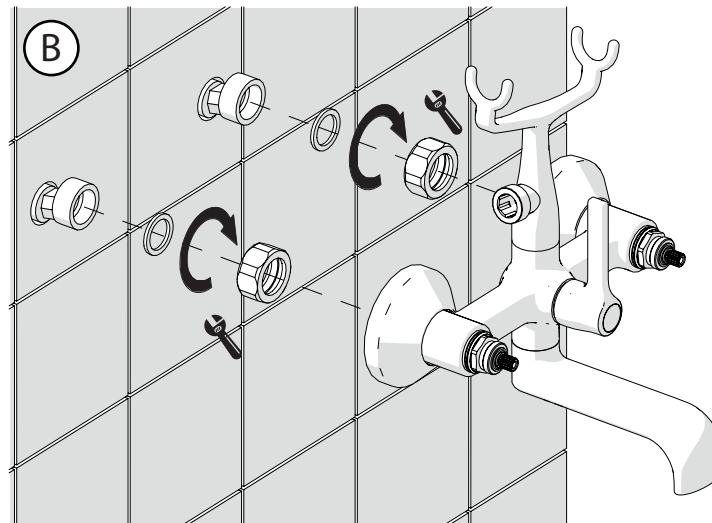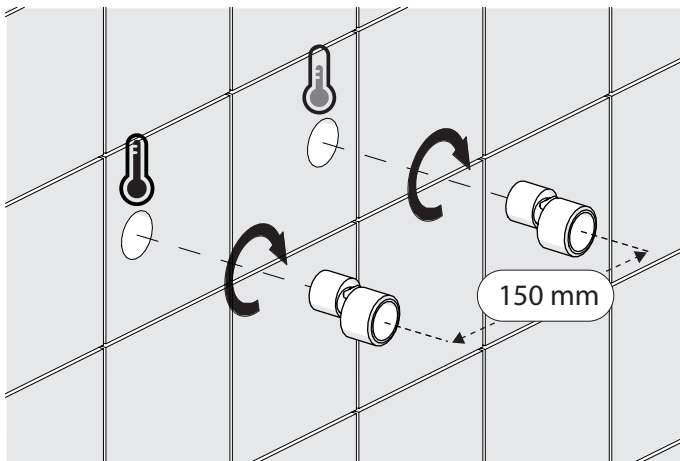


4

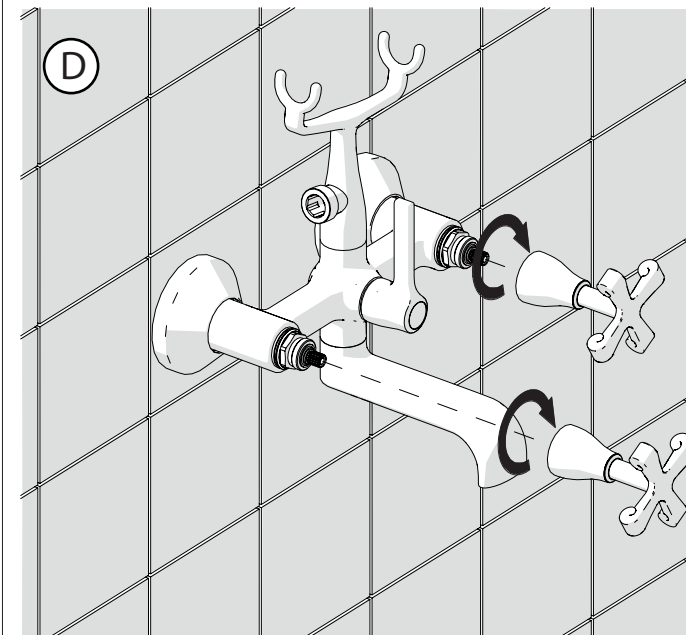

6

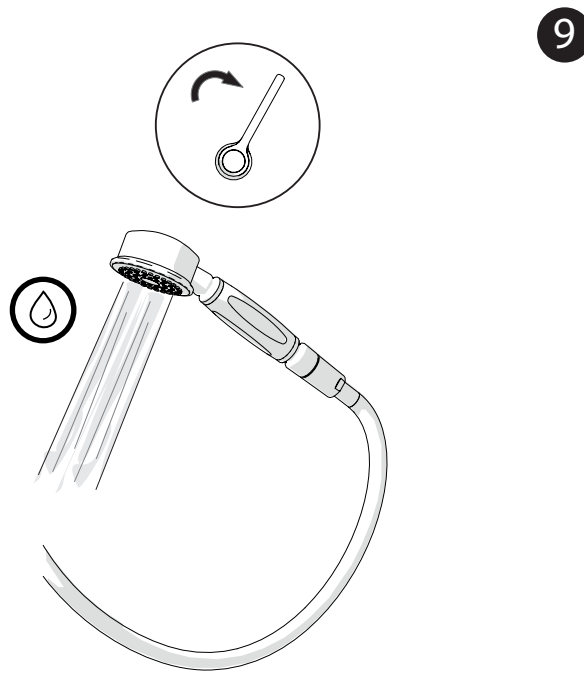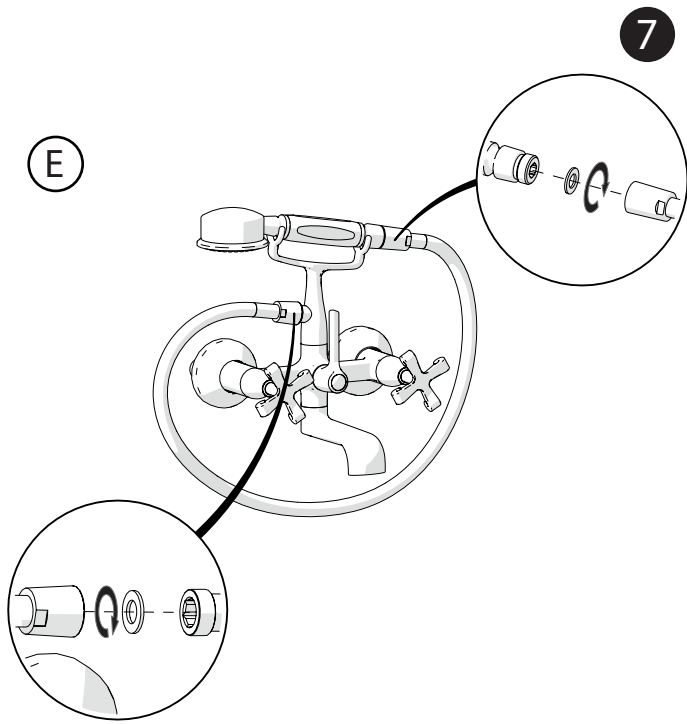

**NOBILIS®**  
The Best Technology for Water

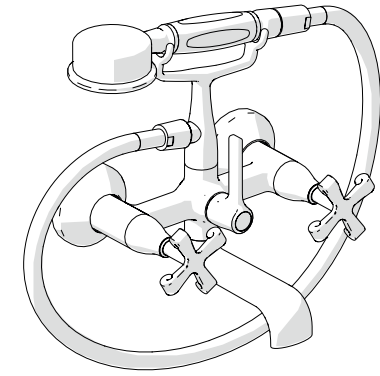


CP210



IISTRCP210#---STD

www.grupponobili.it

REV.2.07/2017

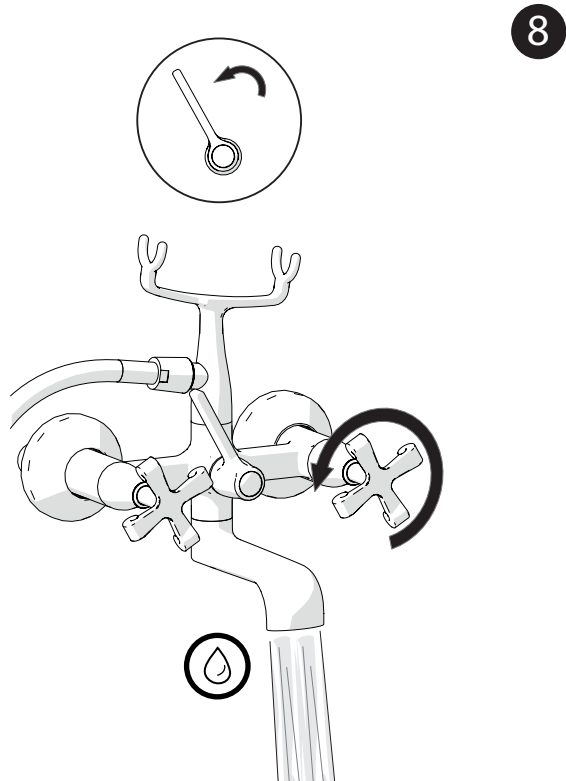

**10**

Insert the 2 columns into the 2 Ø 30 mm top holes with 150 mm spacing  
Screw the external bath assembly with the gaskets using the CH 30 mm key

